



NOTE: ALL LETTERING SHALL BE 1/8" MINIMUM HEIGHT.

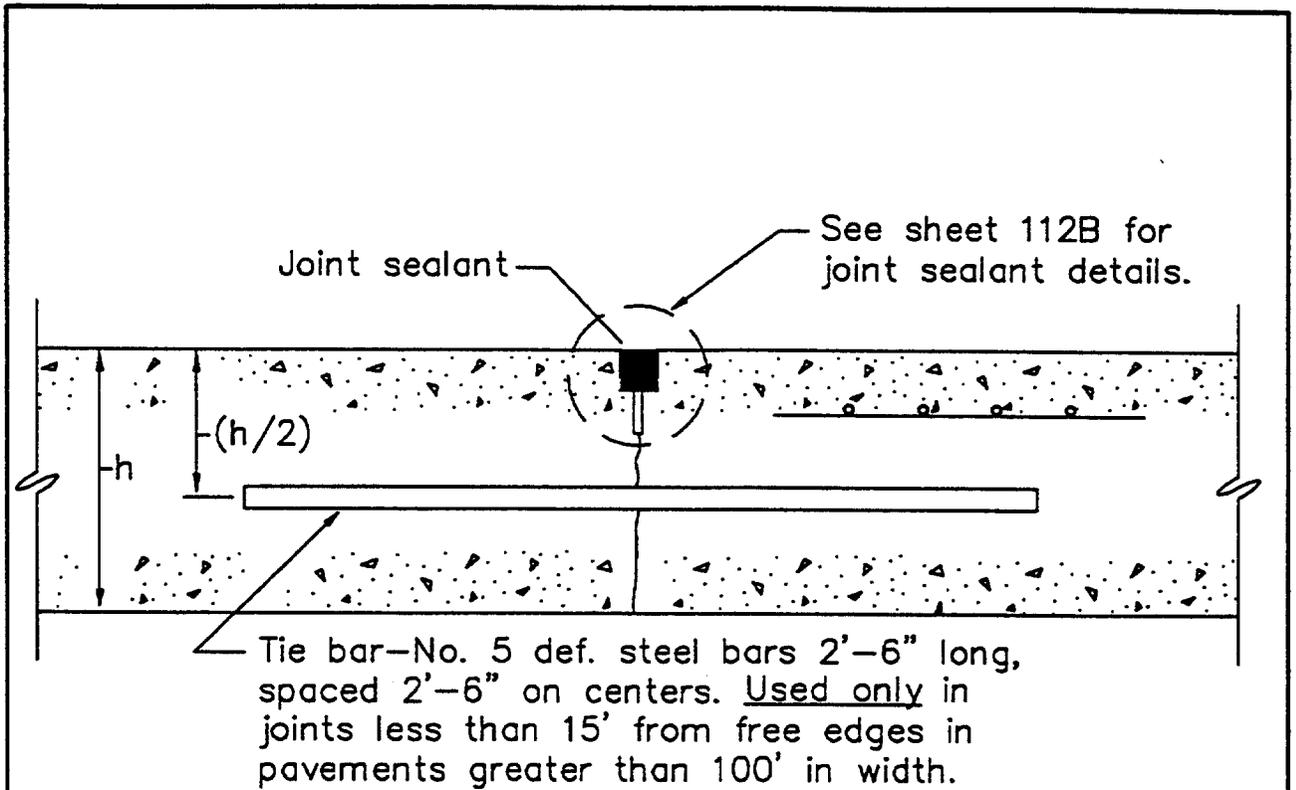

LONGITUDINAL

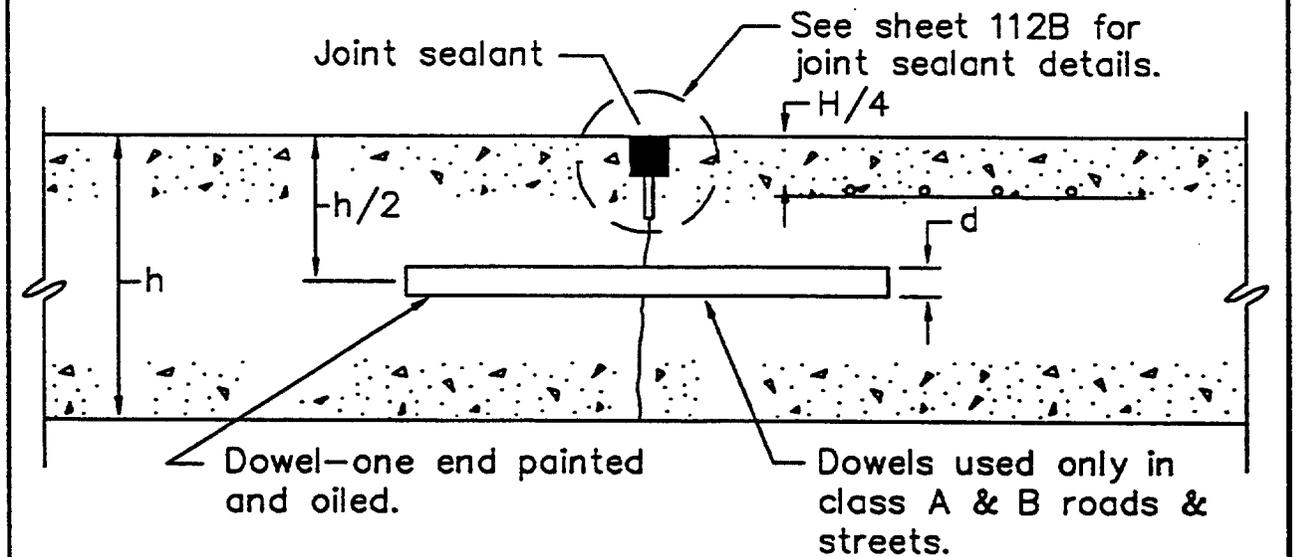

TRANSVERSE

NOTE:

Designer to refer to TM5-809-12 for design info.

CONTRACTION JOINTS


CORPS OF ENGINEERS, U.S. ARMY, SACRAMENTO DISTRICT  
STANDARD DETAILS  
NON-REINFORCED VEHICULAR RIGID  
WAREHOUSE FLOOR SLAB ON GRADE

DATE: FEB 92


P-20

112A

NOTE: ALL LETTERING SHALL BE 1/8" MINIMUM HEIGHT.

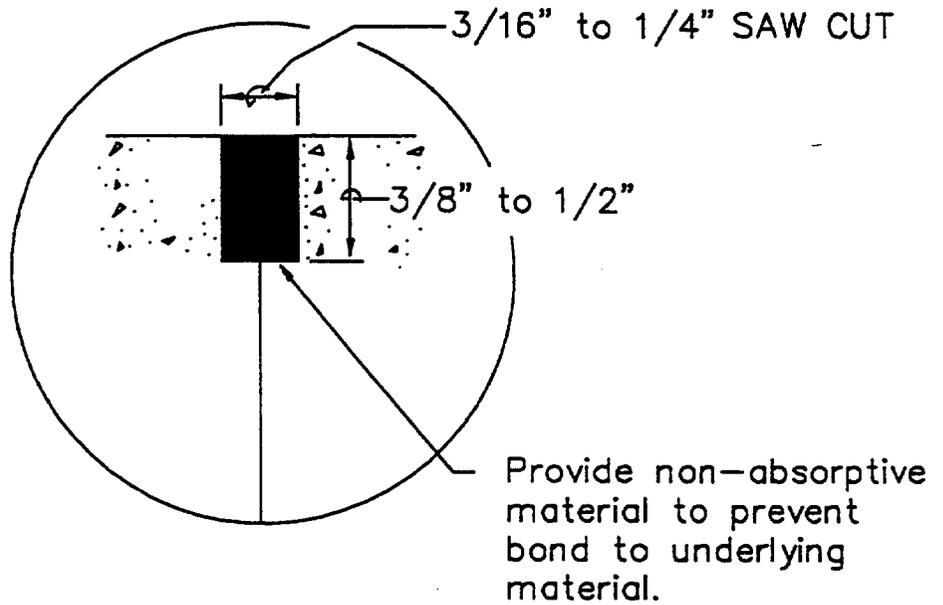

CONSTRUCTION JOINT SEALANT DETAIL

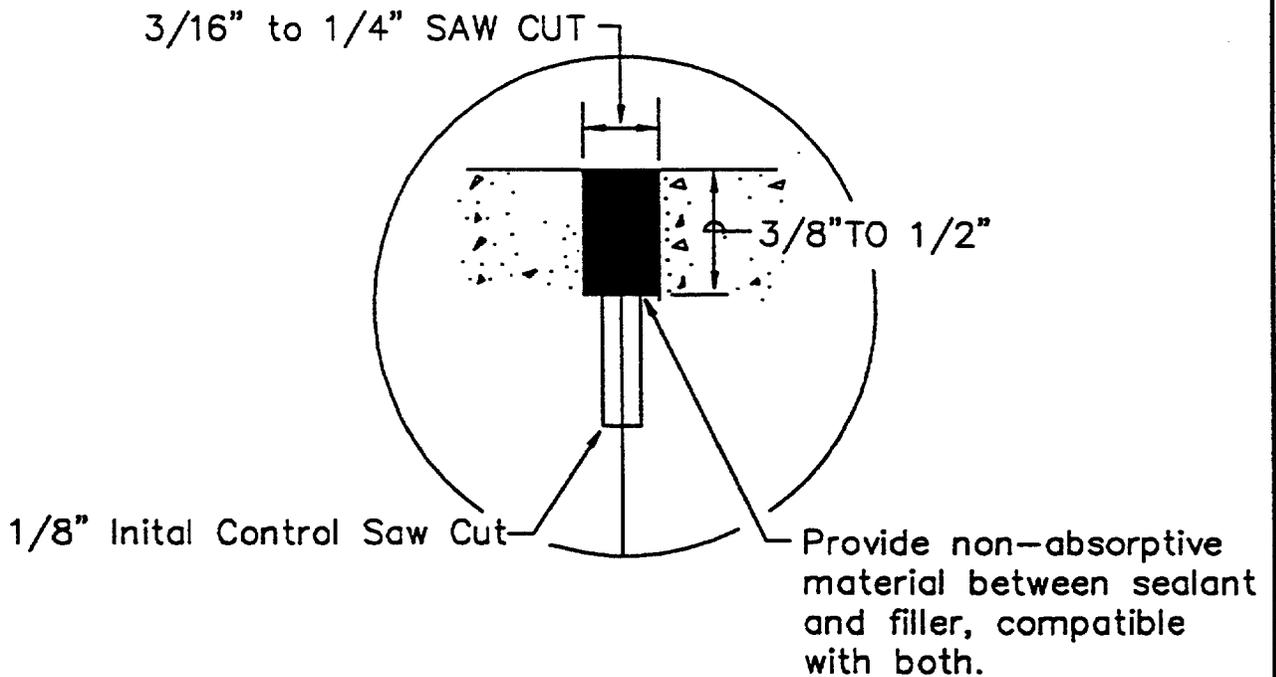

CONTRACTION JOINT SEALANT DETAIL


POURED-IN-PLACE JOINT SEALANT

CORPS OF ENGINEERS, U.S. ARMY, SACRAMENTO DISTRICT  
STANDARD DETAILS  
NON-REINFORCED VEHICULAR RIGID PAVEMENT JOINT DETAILS  
WARE HOUSE FLOOR SLAB ON GRADE

P-21


112B

NOTE: ALL LETTERING SHALL BE 1/8" MINIMUM HEIGHT.

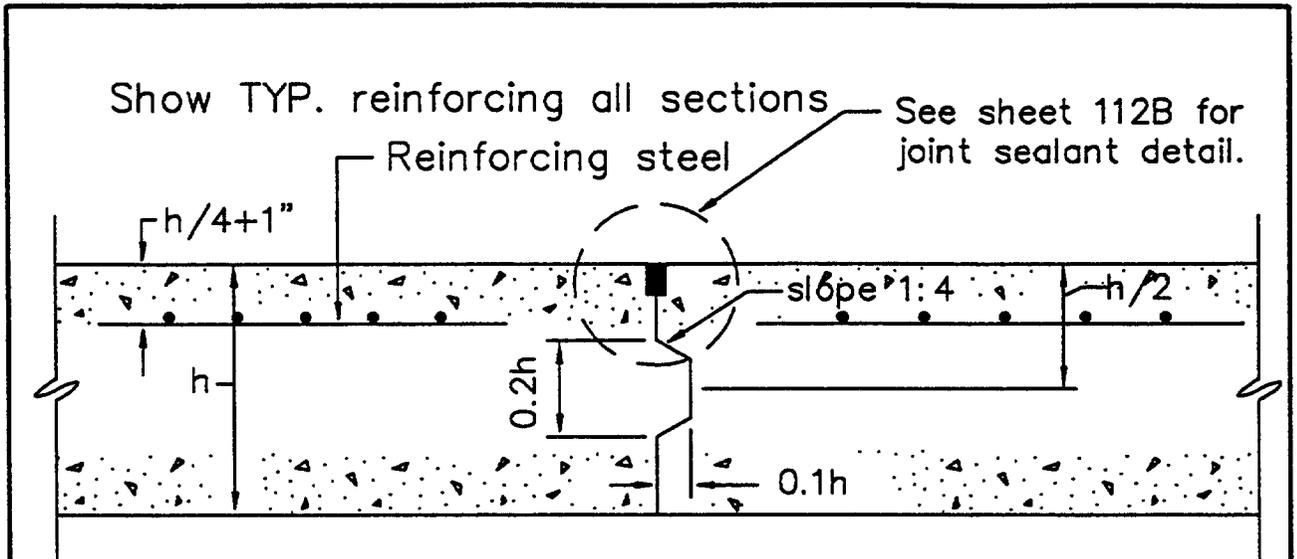

(Limited to  $h \geq 9$  inches)

KEYED LONGITUDINAL

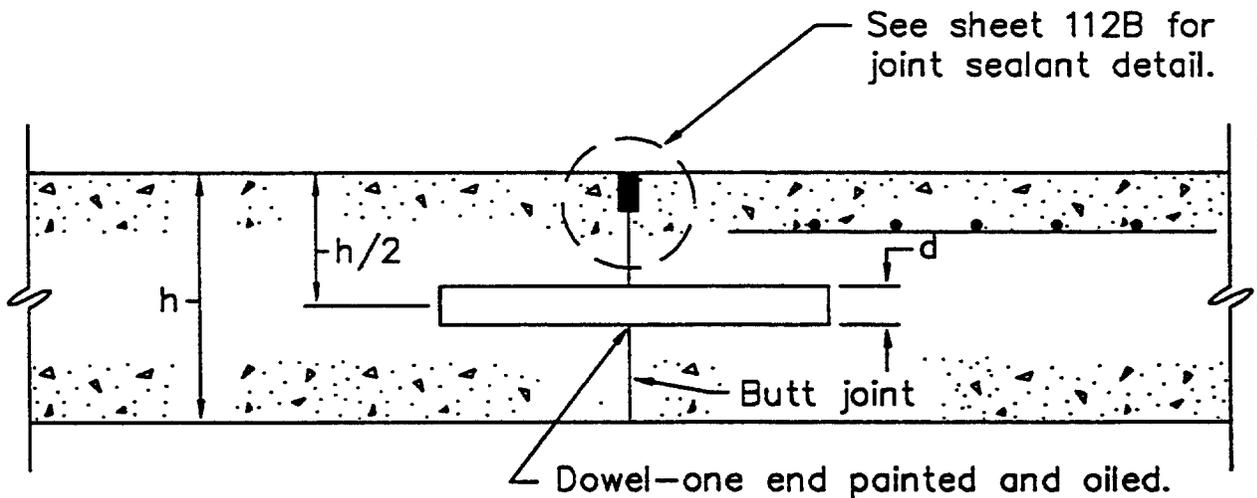

NOTE: See TM5-809-12, for design information.

(Use if  $h < 9$  inches or Class A or B traffic.)

DOWELED TRANSVERSE  
OR LONGITUDINAL  
CONSTRUCTION JOINTS  
(KEYED or DOWELED)

CORPS OF ENGINEERS, U.S. ARMY, SACRAMENTO DISTRICT  
STANDARD DETAILS  
NON-REINFORCED VEHICULAR PAVEMENT JOINT DETAILS  
WAREHOUSE FLOOR SLAB ON GRADE

DATE: FEB 92

P-22

112C